


FIGURE 4™ PRO-BLK 10

Production-grade additive manufacturing material with game-changing thermoplastic-like mechanical properties and long-term environmental stability.



Drumlord Limited
Prototyping Technologies

VERSATILE RIGID HEAT RESISTANT MATERIAL COMBINES SPEED, STRENGTH, EXCELLENT MECHANICAL PROPERTIES FOR TOOL-LESS, DIRECT PRODUCTION OF PLASTIC PARTS.

Figure 4 PRO-BLK 10 delivers on the promise of additive manufacturing with true direct digital production of plastic parts. Go from CAD to manufacturing line in one day with tool-less, same day part production. With a fast print speed and simplified post-processing that includes a single curing cycle and single solvent cleaning, this material delivers exceptional throughput. It is a high precision resin producing parts with a smooth surface finish and sidewall quality, and has excellent mechanical properties and long-term environmental stability that brings a new level of assurance to 3D production.

APPLICATIONS

- Tool-less, same day production
- Direct production of small black plastic parts; examples include: motor housings, connectors, snap-fits, automotive interior and other general-use parts
- Digital production to replace injection molding or soft tooling processes

MATERIAL PROPERTIES

The full suite of mechanical properties are given per ASTM and ISO standards where applicable. In addition, properties such as flammability, dielectric properties, and 24 hour water absorption. This allows for better understanding of the material capability to aid in design decisions for the material. All parts are conditioned per ASTM recommended standards for a minimum of 40 hours at 23 °C, 50% RH.

Solid material properties reported were printed along the vertical axis (ZY-orientation). Figure 4 material properties are relatively uniform across print orientations, as detailed in the following section on Isotropic Properties. Because of this, parts do not need to be oriented in a particular direction to exhibit these properties.

BENEFITS

- Improved environmental stability of mechanical and performance properties over time
- Fast throughput for part-in-hand with no secondary thermal cure required
- Simple, single solvent cleaning
- Excellent surface quality and repeatability
- Accurate, low distortion material for fast first article print success

FEATURES

- Fast print speed up to 62 mm/hr at 50 micron layer thickness
- 70 °C heat deflection temperature, 12% elongation at break
- Durability and strength
- UL94 HB flammability
- Biocompatible capable per ISO10993-5 and ISO10993-10
- Exhibits thermoplastic behavior in necking at tensile break point

LIQUID & SOLID MATERIAL
PROPERTIES OVERLEAF >>


The information in this data sheet, as supplied by the material manufacturers, is provided for general guidance only, in good faith and without warranty. The performance characteristics may vary depending on the application, operating conditions or other materials in combination and it is the responsibility of the customer to determine the suitability of the product for its end use.

DRUMLORD LTD UNIT 6, DARREN DRIVE PRINCE OF WALES INDUSTRIAL ESTATE ABERCARN, NEWPORT NP11 5AR | T +44 (0)1495 249232 F: +44 (0)1495 249050 E: MAIL@DRUMLORD.CO.UK DRUMLORD.CO.UK

FIGURE 4™ PRO-BLK 10

Production-grade additive manufacturing material with game-changing thermoplastic-like mechanical properties and long-term environmental stability.

Drumlord Limited
Prototyping Technologies



LIQUID MATERIAL

MEASUREMENT	CONDITION/METHOD	METRIC	ENGLISH
Viscosity	Brookfield Viscometer @ 25 °C (77 °F)	293 cps	709 lb/ft-hr
Color		Black	Black
Liquid Density	Kruss K11 Force Tensiometer @ 25 °C (77 °F)	1.07 g/cm ³	0.039 lb/in ³
Default Print Layer Thickness	(Standard Mode)	0.05 mm	0.002 in

SOLID MATERIAL

METRIC	ASTM METHOD	METRIC	ENGLISH	ISO METHOD	METRIC	ENGLISH
PHYSICAL				PHYSICAL		
Solid Density	ASTM D792	1.16 g/cm ³	0.042 lb/in ³	ISO 1183	1.16 g/cm ³	0.042 lb/in ³
24 Hour Water Absorption	ASTM D570	1.16%	1.16%	ISO 62	1.16%	1.16%
MECHANICAL				MECHANICAL		
Tensile Strength Ultimate	ASTM D638*	63 MPa	9140 psi	ISO 527 -1/2	58 MPa	8348 psi
Tensile Strength at Yield	ASTM D638	63 MPa	9140 psi	ISO 527 -1/2	58 MPa	8348 psi
Tensile Modulus	ASTM D638	2320 MPa	336 ksi	ISO 527 -1/2	2275 MPa	330 ksi
Elongation at Break	ASTM D638	12%	12%	ISO 527 -1/2	15%	15%
Elongation at Yield	ASTM D638	4.7%	4.7%	ISO 527 -1/2	4.3%	4.3%
Flex Strength	ASTM D790	92 MPa	13340 psi	ISO 178	89 MPa	12940 psi
Flex Modulus	ASTM D790	2290 MPa	332 ksi	ISO 178	2783 MPa	404 ksi
Izod Notched Impact	ASTM D256	24 J/m	0.5 ft-lb/in	ISO 180-A	2 J/m ²	0.0009 ft-lb/in ²
Izod Unnotched Impact	ASTM D4812	614 J/m	11.5 ft-lb/in	ISO 180-U	-	-
Shore Hardness	ASTM D2240	79D	79D	ISO 7619	79D	79D
THERMAL				THERMAL		
Tg (DMA, E")	ASTM E1640 (E"at 1C/min)	62 °C	144 °F	ISO 6721-1/11 (E"at 1C/min)	62 °C	144 °F
HDT @ 0.455 MPa/66 PSI	ASTM D648	70 °C	158 °F	ISO 75- 1/2 B	67 °C	153 °F
HDT @ 1.82 MPa/264 PSI	ASTM D648	56 °C	133 °F	ISO 75-1/2 A	55 °C	132 °F
CTE below Tg	ASTM E831	71 ppm/°C	39 ppm/°F	ISO 11359-2	71 ppm/°C	39 ppm/°F
CTE above Tg	ASTM E831	188 ppm/°C	104 ppm/°F	ISO 11359-2	188 ppm/°C	104 ppm/°F
UL Flammability	UL94	HB	HB	-	-	-
ELECTRICAL				ELECTRICAL		
Dielectric Strength (V/mil) @ 3.0 mm thickness	ASTM D149	19.3	-	-	-	-
Dielectric Constant @1MHz	ASTM D150	3.17	-	-	-	-
Dissipation Factor @1MHz	ASTM D150	0.012	-	-	-	-
Volume Resistivity (ohm-cm)	ASTM D257	2.6x10 ¹⁵	-	-	-	-

ISOTROPIC MATERIAL PROPERTIES OVERLEAF >>

FIGURE 4™ PRO-BLK 10

Production-grade additive manufacturing material with game-changing thermoplastic-like mechanical properties and long-term environmental stability.

Drumlord Limited
Prototyping Technologies


ISOTROPIC PROPERTIES

Figure 4 technology prints parts that are isotropic in mechanical properties meaning the parts printed along either the XYZ axis will give similar results.



Parts do not need to be oriented to get the highest mechanical properties, further improving the degree of freedom for part orientation for mechanical properties.

SOLID MATERIAL



METRIC	METHOD	METRIC			
MECHANICAL					
		ZY	XZ	XY	Z45
Tensile Strength Ultimate	ASTM D638	63 MPa	56 MPa	60 MPa	57 MPa
Tensile Strength Yield	ASTM D639	63 MPa	56 MPa	60 MPa	57 MPa
Tensile Modulus	ASTM D640	2320 MPa	2315 MPa	2330 MPa	2300 MPa
Elongation at Break	ASTM D641	12%	12%	13%	11%
Elongation at Yield	ASTM D642	4.7%	4.7%	4.7%	4.4%
Flex Strength	ASTM D790	92 MPa	91 MPa	90 MPa	85 MPa
Flex Modulus	ASTM D790	2320 MPa	2280 MPa	2742 MPa	2339 MPa
Izod Notched Impact	ASTM D256	24 J/m	22 J/m	23 J/m	23 J/m
Shore Hardness	ASTM D2240	79D	80D	79D	80D




YZ - ORIENTATION



XZ - ORIENTATION



XY - ORIENTATION

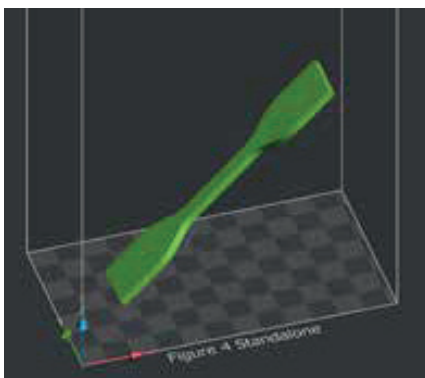

Z45 DEGREE - ORIENTATION

LONG TERM ENVIRONMENTAL STABILITY PROPERTIES OVERLEAF >>

The information in this data sheet, as supplied by the material manufacturers, is provided for general guidance only, in good faith and without warranty. The performance characteristics may vary depending on the application, operating conditions or other materials in combination and it is the responsibility of the customer to determine the suitability of the product for its end use.

FIGURE 4™ PRO-BLK 10





Production-grade additive manufacturing material with game-changing thermoplastic-like mechanical properties and long-term environmental stability.

Drumlord Limited
Prototyping Technologies





LONG TERM ENVIRONMENTAL STABILITY

Figure 4 PRO-BLK 10 is engineered to give long term environmental UV and humidity stability. This means the material is tested for the ability to retain a high percent of the initial mechanical properties over a given period of time. This provides real design conditions to consider for the application or part. **Actual data value is on Y-axis, and data points are % of initial value.**

INDOOR STABILITY: Tested per ASTM D4329 standard method.

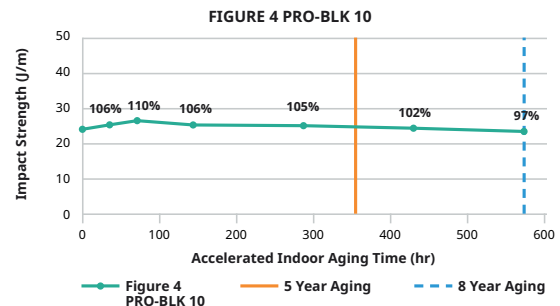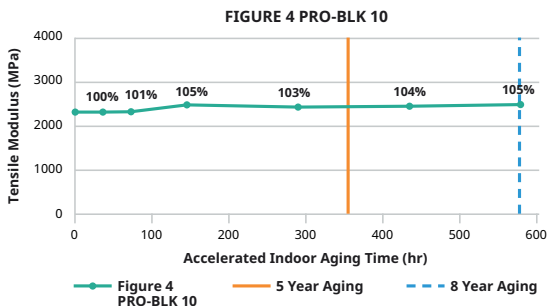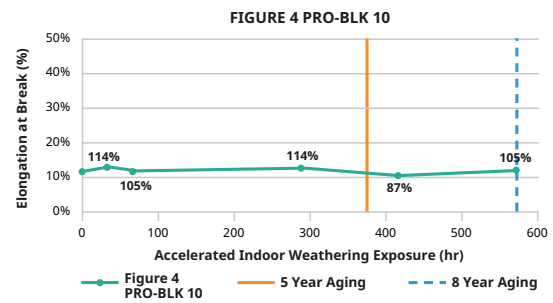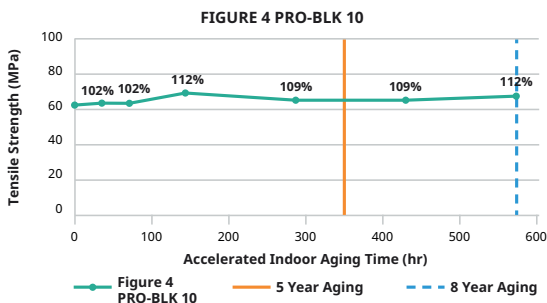

OUTDOOR STABILITY: Tested per ASTM G154 standard method.

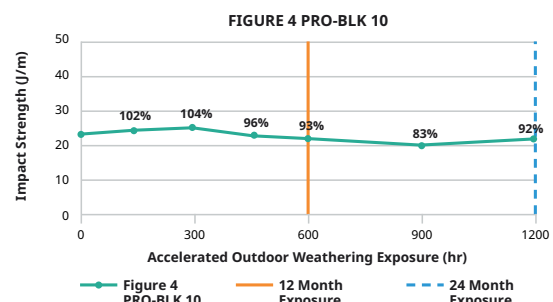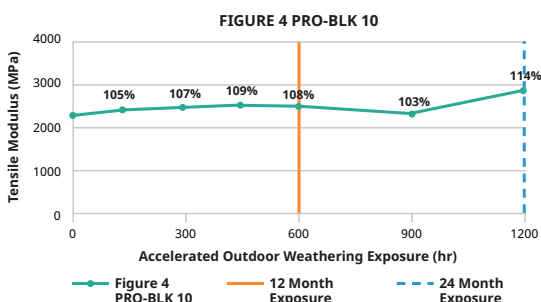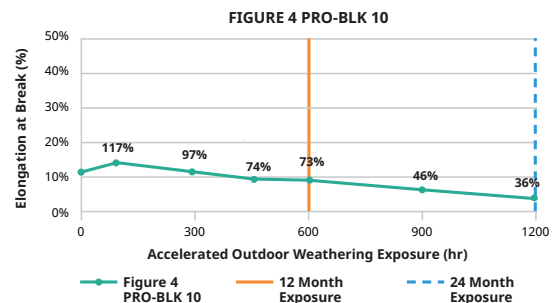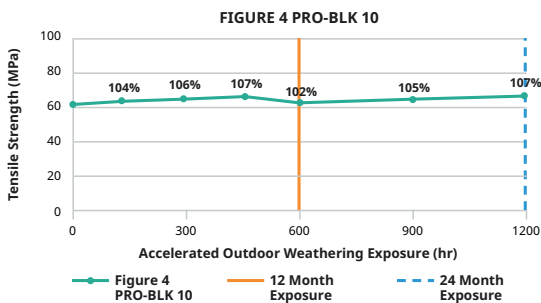


AUTOMOTIVE FLUID COMPATIBILITY
PROPERTIES OVERLEAF >>

The information in this data sheet, as supplied by the material manufacturers, is provided for general guidance only, in good faith and without warranty. The performance characteristics may vary depending on the application, operating conditions or other materials in combination and it is the responsibility of the customer to determine the suitability of the product for its end use.

FIGURE 4™ PRO-BLK 10

Production-grade additive manufacturing material with game-changing thermoplastic-like mechanical properties and long-term environmental stability.



Drumlord Limited
Prototyping Technologies

AUTOMOTIVE FLUID COMPATIBILITY

The compatibility of a material with hydrocarbons and cleaning chemicals is critical to part application. Figure 4 PRO-BLK 10 parts were tested for sealed and surface contact compatibility per USCAR2 test conditions. The fluids below were tested in two different ways per the specs.

- Immerse for 7-days, then take mechanical property data for comparison.
- Immerse for 30-minutes, remove, and take mechanical property data for comparison in 7-days

Data reflects the measured value of properties over that period of time.

AUTOMOTIVE FLUIDS

FLUID	SPECIFICATION	TEST TEMP °C
Gasoline	ISO 1817, liquid C	23 ± 5
Diesel Fuel	905 ISO 1817, Oil No. 3 + 10% p-xylene*	23 ± 5
Engine Oil	ISO 1817, Oil No. 2	50 ± 3
Ethanol	85% Ethanol + 15% ISO 1817 liquid C*	23 ± 5
Power Steering Fluid	ISO 1917, Oil No. 3	50 ± 3
Automotive Transmission Fluid	Dexron VI (North American specific material)	50 ± 3
Engine Coolant	50% ethylene glycol + 50% distilled water*	50 ± 3
Brake Fluid	SAE RM66xx (Use latest available fluid for xx)	50 ± 3
Diesel Exhaust Fluid (DEF)	API certified per ISO 22241	23 ± 5

*Solutions are determined as percent by volume

FIGURE 4 PRO-BLK 10

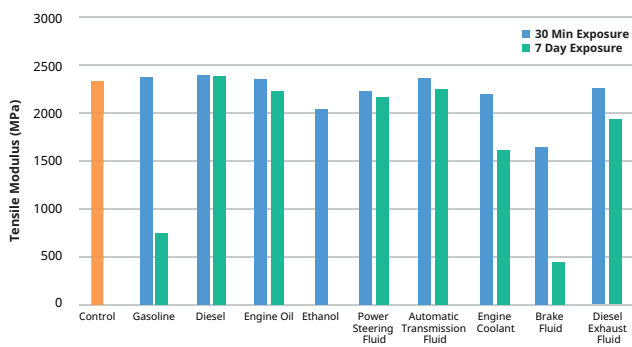


FIGURE 4 PRO-BLK 10

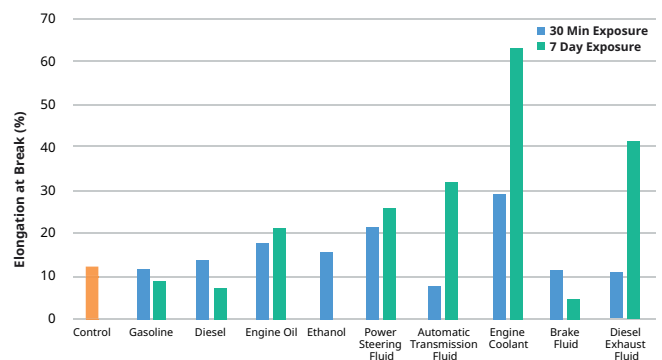


FIGURE 4 PRO-BLK 10


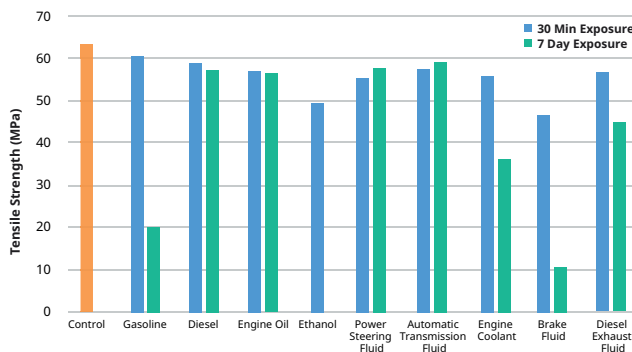


FIGURE 4 PRO-BLK 10

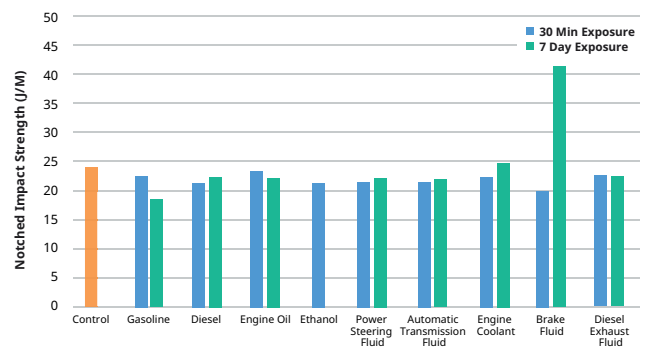


CHEMICAL COMPATIBILITY PROPERTIES OVERLEAF >>

The information in this data sheet, as supplied by the material manufacturers, is provided for general guidance only, in good faith and without warranty. The performance characteristics may vary depending on the application, operating conditions or other materials in combination and it is the responsibility of the customer to determine the suitability of the product for its end use.

FIGURE 4™ PRO-BLK 10

Production-grade additive manufacturing material with game-changing thermoplastic-like mechanical properties and long-term environmental stability.



Drumlord Limited
Prototyping Technologies

CHEMICAL COMPATIBILITY

The compatibility of a material with cleaning chemicals is critical to part application. Figure 4 PRO-BLK 10 parts were tested for sealed and surface contact compatibility per ASTM D543 test conditions. The fluids below were tested in two different ways per the specs.

- Immerse for 7-days, then take mechanical property data for comparison.
- Immerse for 30-minutes, remove, and take mechanical property data for comparison in 7-days

Data reflects the measured value of properties over that period of time.

*Denotes materials did not go thru 7-day soak conditioning.

CHEMICAL COMPATIBILITY

- 6.3.3 Acetone
- 6.3.12 Detergent Solution, Heavy Duty
- 6.3.23 Hydrochloric Acid (10%)
- 6.3.38 Sodium Carbonate Solution (20%)
- 6.3.44 Sodium Hypochlorite Solution
- 6.3.46 Sulfuric Acid (30%)
- 6.3.42 Sodium Hydroxide Soln (10%)
- Distilled Water

FIGURE 4 PRO-BLK 10

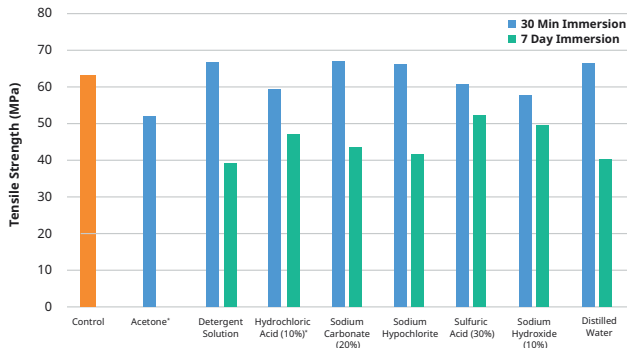


FIGURE 4 PRO-BLK 10

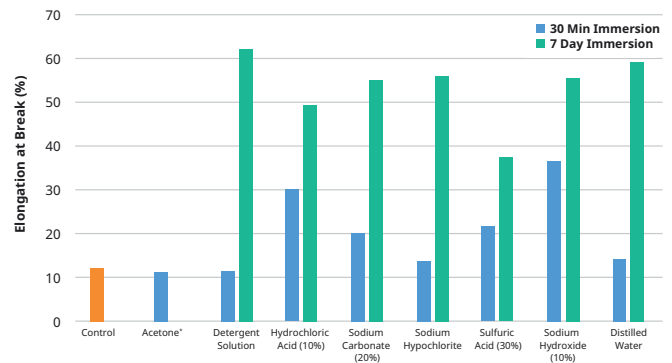


FIGURE 4 PRO-BLK 10


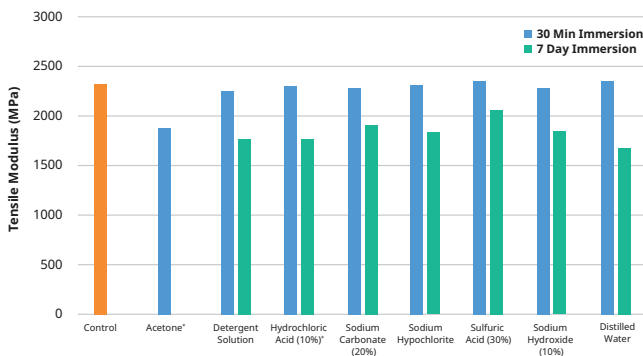


FIGURE 4 PRO-BLK 10

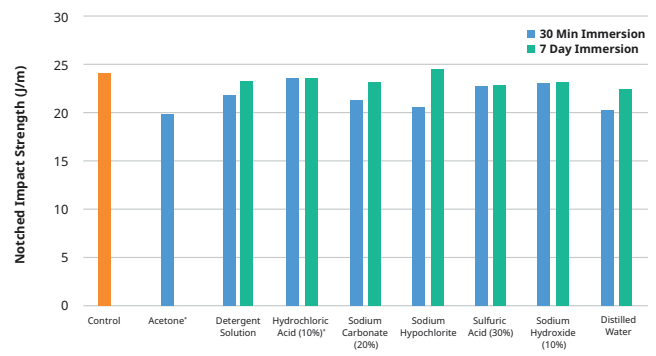


BIOCOMPATIBILITY STATEMENT OVERLEAF >>

The information in this data sheet, as supplied by the material manufacturers, is provided for general guidance only, in good faith and without warranty. The performance characteristics may vary depending on the application, operating conditions or other materials in combination and it is the responsibility of the customer to determine the suitability of the product for its end use.

FIGURE 4™ PRO-BLK 10

Production-grade additive manufacturing material with game-changing thermoplastic-like mechanical properties and long-term environmental stability.



Drumlord Limited
Prototyping Technologies

BIOCOMPATIBILITY STATEMENT

Figure 4® PRO-BLK 10 test coupons printed and processed according to the post processing instructions below were provided to an external biological testing laboratory for evaluation in accordance with *ISO 10993-5, Biological evaluation of medical devices - Part 5: Tests for in vitro cytotoxicity*, and *ISO 10993-10, Biological evaluation of medical devices - Part 10: Tests for irritation and skin sensitization (GPMT)*. The test results indicate that Figure 4® PRO-BLK 10 has passed the requirements for biocompatibility according to the above tests.

It is the responsibility of each customer to determine that its use of Figure 4® PRO-BLK 10 material is safe, lawful and technically suitable to the customer's intended applications. Customers should conduct their own testing to ensure that this is the case. Because of possible changes in the law and in regulations, as well as possible changes in these materials, Drumlord Ltd cannot guarantee that the status of these materials will remain unchanged or that it will qualify as biocompatible in any particular use. Therefore, Drumlord Ltd recommends that customers continuing to use these materials verify their status on a periodic basis.